

Company Directive

ENGINEERING SPECIFICATION

EE SPEC: 136

Ancillary Electrical Equipment for Use in Conjunction with Switchgear and Protection/Control Panels

Author: Andy Hood

Implementation Date: June 2017

Approved by



Policy Manager

Date:

16 June 2017

All references to Western Power Distribution or WPD must be read as National Grid Electricity Distribution or NGED

NOTE: The current version of this document is stored in the NGED Corporate Information Database. Any other copy in electronic or printed format may be out of date. Copyright © 2022 National Grid Electricity Distribution

IMPLEMENTATION PLAN

Introduction

This document specifies the ancillary equipment to be used in conjunction with switchgear and protection / control panels.

Main Changes

This is a new document and replaces information on ancillary equipment included in other Engineering Specification documents.

Impact of Changes

This document replaces the information on ancillary items currently contained in EE SPEC: 3, EE SPEC: 86 and EE SPEC: 87.

Implementation Actions

Managers shall ensure that all staff involved with the specification, installation and maintenance of HV, EHV and 132kV switchboards and protection / control / alarm panels are aware of and adhere to the requirements of this document.

Implementation Timetable

This document shall be implemented on issue for the specification of new or replacement ancillary equipment.

REVISION HISTORY

Document Revision & Review Table		
Date	Comments	Author
June 2017	<p>This is a new document that replaces the requirements for ancillary equipment included in other EE Specification documents. The most significant changes are listed below:</p> <ul style="list-style-type: none">• i5M transducers have been introduced• Incandescent lamps have been replaced by LED clusters	Andy Hood

INDEX

1.0	INTRODUCTION
2.0	PROTECTION AND ALARM RELAYS
3.0	AUXILIARY RELAYS AND CONTACTORS
4.0	CONTROL AND SELECTOR SWITCHES
5.0	TRANSDUCERS
6.0	PUSH BUTTONS AND LAMPS

APPENDIX A	AUXILIARY RELAY DATA SHEETS
APPENDIX B	TRANSDUCER DATA SHEETS
APPENDIX C	PUSH BUTTON AND LAMP DATA SHEETS
APPENDIX D	SUPERSEDED DOCUMENTATION
APPENDIX E	ASSOCIATED DOCUMENTATION
APPENDIX F	IMPACT ON COMPANY
APPENDIX G	KEY WORDS

1.0 INTRODUCTION

- 1.1 This document details the ancillary equipment to be used in conjunction with switchgear and protection/control panels.
- 1.2 This is a new document and replaces information on ancillary equipment held in sections of other Engineering Specification documents including EE SPEC: 3, EE SPEC: 86 and EE SPEC: 87.

2.0 PROTECTION AND ALARM RELAYS

- 2.1 Protection, alarm and control relays shall comply with ENATS 48-4, ENATS 48-5, BSEN 60255, IEC 60255, BSEN 61810 and BSEN 61811 as applicable and be of a type and make approved for use within Western Power Distribution.
- 2.2 The approved relay list is contained within the current version of Engineering Specification EE SPEC: 98.
- 2.3 Alternative relays can be submitted to the Technical Policy Manager for evaluation.

3.0 AUXILIARY RELAYS AND CONTACTORS

- 3.1 Auxiliary relays and small contactors shall comply with ENATS 50-18.
- 3.2 Datasheets for auxiliary relays used for telecontrol purposes are provided in Appendix A.
- 3.3 Relays operated by WPDs telecontrol system are switched in both the +ve and -ve circuits. Unless otherwise specified, relays shall be suitable for use with the D.C. auxiliary supply voltage/s specified on the Switchgear Enquiry / Ordering Schedule. If there is any doubt over the required relay ratings the tenderer shall confirm the requirements with WPD at the time of tender.

4.0 CONTROL AND SELECTOR SWITCHES

- 4.1 Control and selector switches and their handles shall meet the requirements of ENATS 50-18 and BS EN 60947-3 and shall be adequately rated for the application. Switches used within trip or close circuits shall as a minimum satisfy the following requirements:
 - Category AC22A (switching of mixed resistive and inductive ac. loads): 32A at 250/415V
 - Category AC23A (switching of motor loads or other highly ac. inductive loads): 28A at 250/415V
 - Category DC21 (switching of resistive dc. loads): 3.5A at 110V
- 4.2 Datasheets for control and selector switches are provided in Appendix B.

5.0 TRANSDUCERS

5.1 All transducers shall comply with BS EN 60688 and shall be self-powered unless otherwise specified in the schedule. They shall be located to allow easy access for testing and removal. The following general requirements also apply:

- Temperature reference range: 0°C to 50°C
- Operating temperature range: -10°C to +55°C
- Output voltage: 25Vdc (open circuit voltage)
15Vdc (compliance voltage)
- Burden on output: 1000 ohms (maximum)
100 ohms (typical)
- Resistor in outstation: 333.3 ohms (15mA at 5V)
- Output load: Compliance voltage/maximum rated output.

5.2 Where programmable transducers are provided they shall be pre-programmed by the panel supplier in accordance with the data sheet.

5.3 Data sheets for specific types of transducers are provided in Appendix C.

6.0 PUSH BUTTONS AND LED LAMPS

6.1 Push button switches shall meet the requirements of ESI Standard 50-18 unless otherwise modified by this document. Switches shall be Class I or higher.

6.2 Switching system shall be snap action.

6.3 Contact terminals shall be screw type.

6.4 Contacts shall be hard silver.

6.5 The voltage supply for LEDs shall be both 110V AC and DC. The supply may be manually switched from AC to DC.

6.6 Data sheets and drawings for push button switches and lamps are provided in Appendix D.

AUXILLIARY RELAY DATA SHEET**REFERENCE: AR1**

Relay Function: 1) Circuit Breaker Open
 2) Circuit Breaker Close
 3) Tap-change Control Auto
 4) Tap-change Control Manual
 5) Tap-change Raise
 6) Tap-change Lower

Relay Coil: 48V DC or 24V DC (as specified in Enquiry/Ordering Schedule)
 Continuous rating with transient suppression diode

Relay Type: Self Reset

Approved Relays:

Manufacturer: Arteche / Schneider

Reference: 48V DC: RD-2SYDI 48VDC OP.00001
 24V DC: RD-2SYDI 24VDC OP.00001

Relay Socket: DN DE IP10

Relay Retaining Clip: E-41

Terminal Allocation:

Terminal No.	Description of Function
1 – 2	Relay coil with diode Terminal 1 –ve, Terminal 2 +ve
3 – 5 – 7	3 – 5 normally open contact
	3 – 7 normally closed contact
4 – 6 – 8	4 – 6 normally open contact
	4 – 8 normally closed contact

AUXILLIARY RELAY DATA SHEET**REFERENCE: AR2**

Functions:

- 1) SEF In / Out of Service
- 2) Instantaneous In / Out of Service
- 3) Auto Reclose In / Out of Service
- 4) Tap-change Control 3% Voltage Reduction In / Out
- 5) Tap-change Control 6% Voltage Reduction In / Out
- 6) Tap-change Control Independent / Manual
- 7) Tap-change Control Raise Inhibit

Relay Coil:

Operate Coil:
48V DC or 24V DC (as specified in ordering schedule)
Continuous rating with transient suppression diode

Reset Coil:
48V DC or 24V DC (as specified in ordering schedule)
Intermittent rating with transient suppression

Relay Type: Latching

Operating Convention: When the relay is reset the function is "In Service" and when the operate coil is energised the function is "Out of Service".

Approved Relays:

Manufacturer: Artech / Schneider

Reference: 48V DC: BF-3BB 48VDC
24V DC: BF-3BB 24VDC

Relay Socket: FN DE IP10

Relay Retaining Clip: E-31

Terminal Allocation:

Terminal No.	Description of Function
10 - 14	Main relay coil with diode and normally closed contact. Terminal 14 +ve, Terminal 10 -ve
1 - 2	Reset relay coil with diode and normally open contact. Terminal 1 -ve, terminal 2 +ve
7 - 3 - 11	7 – 3 normally open contact
	3 – 11 normally closed contact
8 - 4 - 12	8 – 4 normally open contact
	4 – 12 normally closed contact
9 - 5 - 13	9 - 5 normally open contact
	5 – 13 normally closed contact

AUXILLIARY RELAY DATA SHEET**REFERENCE: AR3**

Functions: 1) Auto Reclose Counter Reset
2) Protection Reset

Relay Coil: 48V DC or 24V DC (as specified in Enquiry/Ordering Schedule)
Continuous rating with transient suppression diode

Relay Type: Self Reset

Approved relays:

Manufacturer: Artech / Schneider

Reference: 48V DC: RD-2SYDI 48VDC OP.00001
24V DC: RD-2SYDI 24VDC OP.00001

Relay Socket: DN DE IP10

Relay Retaining Clip: E-41

Terminal Allocation:

Terminal No.	Description of Function
1 – 2	Relay coil with diode Terminal 1 –ve, Terminal 2 +ve
3 – 5 – 7	3 – 5 normally open contact
	3 – 7 normally closed contact
4 – 6 – 8	4 – 6 normally open contact
	4 – 8 normally closed contact

AUXILLIARY RELAY DATA SHEET

REFERENCE: AR4

Function: 1) Arc Suppression Coil Shorting Switch Auto/Non-Auto

Relay Coil: Operate Coil:
48V DC or 24V DC (as specified in ordering schedule)
Continuous rating with transient suppression diode

Reset Coil:
48V DC or 24V DC (as specified in ordering schedule)
Intermittent rating with transient suppression

Relay Type: Latching

Operating Convention: When the relay is reset the function is in “Auto” and when the operate coil is energised the function is in “Non-Auto”.

Approved relays:

Manufacturer: Arteche / Schneider

Reference: 48V DC: BF-3BB 48VDC
24V DC: BF-3BB 24VDC

Relay Socket: FN DE IP10

Relay Retaining Clip: E-31

Terminal Allocation:

Terminal No.	Description of Function
10 - 14	Main relay coil with diode and normally closed contact. Terminal 14 +ve, terminal 10 -ve
1 - 2	Reset relay coil with diode and normally open contact. Terminal 1 -ve, terminal 2 +ve
7 - 3 - 11	7 – 3 normally open contact
	3 – 11 normally closed contact
8 - 4 - 12	8 – 4 normally open contact
	4 – 12 normally close contact
9 - 5- 13	9 - 5 normally open contact
	5 – 13 normally closed contact

AUXILLIARY RELAY DATA SHEET

REFERENCE: AR5

Function:	1) Protection Trip Status Relay
Relay Coil:	Current Operated. Wound with conductor of minimum cross-sectional area of 1.5 sq mm
Min. Operating Current:	Type A: 0.4A, duration 40 to 120 milliseconds* Type B: 0.15A duration 40 to 120 milliseconds*
Relay Contact:	Reed relay, one normally open contact Contact Rating, 1.0 to 20mA 48V DC
Other Details:	Insulation Test 2kV, 50Hz for 1 minute

Relay to be enclosed in a mild steel case covered by a heat shrink plastic sleeve. The magnetic screening shall be sufficient to prevent spurious operations by the passage of fault current through adjacent metalwork.

The security of the connections to the coil winding is of paramount importance and the coil winding wire shall be used to form the connection tails without intermediate joints. The coil windings shall have the positive tail clearly marked.

Relay requires a separate terminal block.

Approved Relay:	Control Engineering Ltd
Reference:	892 Type A (0.4A) 892 Type B (0.15A)

* Note: For most switchgear an operating current of 0.4A is applicable.

AUXILLIARY RELAY DATA SHEET**REFERENCE: AR6**

Function: 1) AC/DC Indication Auxiliary Relay

Relay Coil: 110V AC continuous rating

Relay Type: Self Reset

Approved relays:

Manufacturer: Arteche / Schneider

Reference: RF-4SY 110VAC OP00001

Relay Base: FN-DE-IP10

Relay Retaining Clip: E-40

Terminal Allocation:

Terminal No.	Description of Function
1 – 2	110V AC relay coil
7 – 3 - 11	7 – 3 normally open contact
	3 – 11 normally closed contact
12 – 4 - 8	8 – 4 normally open contact
	4 – 12 normally closed contact
13 – 5 – 9	9 – 5 normally open contact
	5 – 13 normally closed contact
14 – 6 – 10	10 – 6 normally open contact
	6 – 10 normally closed contact

AUXILLIARY RELAY DATA SHEET**REFERENCE: AR7**

Function: 1) ASC SEF Enable / Disable

Relay Coil: Operate Coil:
48V DC or 24V DC (as specified in ordering schedule)
Continuous rating with transient suppression diode

Relay Type: Self Reset

Approved relays:

Manufacturer: Artech / Schneider

Reference: 48V DC: RF-4SYDI 48VDC OP.00001
24V DC: RF-4SYDI 24VDC OP.00001

Relay Socket: DN DE IP10

Relay Retaining Clip: E-41

Terminal Allocation:

Terminal No.	Description of Function
1 – 2	Relay coil with diode Terminal 1 –ve, Terminal 2 +ve
3 – 7 – 11	3 – 7 normally open contact
	3 – 11 normally closed contact
4 – 8 – 12	4 – 8 normally open contact
	4 – 12 normally closed contact
5 – 9 – 13	5 – 9 normally open contact
	5 – 13 normally closed contact
6 – 10 – 14	6 – 10 normally open contact
	6 – 14 normally closed contact

AUXILLIARY RELAY DATA SHEET**REFERENCE: AR8**

Function: 1) Tap-change Control Lockout Relay

Relay Coil: Operate Coil:
110V AC Continuous Rating
Reset Coil:
100V AC Continuous Rating

Relay Type: Latching

Operating Convention: When the relay is reset the scheme is reset and when the operate relay is energised the scheme is locked out

Approved relays:

Manufacturer: Artech / Schneider

Reference: BF-4 110VDC

Relay Socket: FN DE IP10

Relay Retaining Clip: E-31

Terminal Allocation:

Terminal No.	Description of Function
B1 – 2	110V AC operate relay coil
1 – 2	110V AC reset relay coil
3 – 7 – 11	3 – 7 normally open contact
	3 – 11 normally closed contact
4 – 8 – 12	4 – 8 normally open contact
	4 – 12 normally closed contact
5 – 9 – 13	5 – 9 normally open contact
	5 – 13 normally closed contact
6 – 10 – 14	6 – 10 normally open contact
	6 – 14 normally closed contact

TRANSDUCER DATA SHEET

REFERENCE: TD1

Function:	Current Transducer (1 ampere)
Input Current:	1.0A AC (nominal) 1.5A AC (full scale continuous)
Output Current:	0 to 10mA DC (nominal) 15mA DC (full scale) 25mA DC (maximum)
Accuracy:	Class 0.2
Excessive Input:	Transducer shall withstand: <ul style="list-style-type: none"> • 3x rated current continuously • 4x rated current for 5 minutes • 25x rated current for 3 seconds • 50x rated current for 1 second
Manufacturer:	GE Grid Solutions
Reference:	i5MCX2H1CLNRX

Important - Transducer shall be supplied pre-programmed by the panel supplier in accordance with the above requirements

TRANSDUCER DATA SHEET

REFERENCE: TD2

Function:	AC Voltage Transducer (110 Volts AC)
Input Voltage:	110V AC (nominal) 132V AC (full scale continuous)
Output Current:	0 to 2mA DC for input voltage of 0 to 88V AC 2 to 10mA DC for input voltage 88V to 132V AC
Accuracy:	Class 0.2
Excessive Input:	Transducer shall withstand: <ul style="list-style-type: none"> • 1.5x rated voltage continuously • Shall withstand 2x rated voltage for 10 seconds
Manufacturer:	GE Grid Solutions
Reference:	i5MVX2H1CLNRX

Important - Transducer shall be supplied pre-programmed by the panel supplier in accordance with the above requirements

TRANSDUCER DATA SHEET

REFERENCE: TD4

Function:	Ampere / Voltage / Watt / VAR Transducer (110 volts, 1 ampere)		
Input Current:	1.0A AC (nominal)		
	1.5A AC (full scale continuous)		
Input Voltage:	110V AC (nominal)		
	132V AC (full scale continuous)		
Output:	<u>Amperes:</u>	0 to 10mA DC (nominal)	
		15mA DC (full scale)	
		25mA DC (maximum)	
	<u>Voltage:</u>	0 to 2mA DC for input voltage 0 – 88V a.c.	
		2 to 10mA DC for input voltage 88V to 132V a.c.	
	<u>Watts:</u>	-10mA D.C. to 0 to +10mA D.C. (nominal)	
		Reverse power flow produces negative output	
		Forward power flow produces positive output	
	<u>Vars:</u>	-10mA D.C. to 0 to +10mA D.C. (nominal)	
		Leading Vars produce negative output	
	Lagging Vars produce positive output		
Accuracy:	Class 0.2 for current and voltage measurements		
	Class 0.5S for power measurements		
Excessive Input:	Transducer shall withstand:		
	<ul style="list-style-type: none">• 2x rated current continuously• 5x rated current for 10s• 20x current for 1s• 1.2x rated voltage continuously• 2x rated voltage for 10s		
Manufacturer:	GE Grid Solutions		
Reference:	I5MTX2H1NCLLLRX		
Connection:	4 wire, unbalanced		

Important - Transducer shall be supplied pre-programmed by the panel supplier in accordance with the above requirements

TRANSDUCER DATA SHEET**REFERENCE: TD5**

Function:	Tap Position Indication (TPI) Transducer
Auxiliary Supply:	110V AC (nominal) 80V AC (min) 130Va.c. (max.) 3VA burden
Input:	Chain Resistance 150 to 10,000 ohms
Output:	0 to 10mA DC
Accuracy:	$\leq 2\%$ of full scale reading
Manufacturer:	Fundamentals Ltd
Reference:	FTPT/2

TRANSDUCER DATA SHEET

REFERENCE: TD6

Function: DC Voltage Transducer

The transducer auxiliary supply range, input voltage and output current shall be in accordance with the following table:

Battery Voltage (DC Volts)	24		30		48		110		220	
Auxiliary Supply Range (DC Volts)	19 to 70		19 to 70		19 to 70		70 to 300		70 to 300	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Input Voltage (DC Volts)	20V	29V	25V	36V	40V	58V	80V	140V	160V	280V
Output Current (mA DC)	0mA	10mA	0mA	10mA	0mA	10mA	0mA	10mA	0mA	10mA

Accuracy: +/- 0.5% or less

Manufacturer: GE Grid Solutions

Reference: I5MVX2L1CLNRX (19 to 70V DC Auxiliary Supply)

I5MVX2H1CLNRX (70 to 300V DC Auxiliary Supply)

PUSH BUTTON SWITCH AND LAMP DATA SHEET

REFERENCE: PB1

Switch Functions:

- 1) Auto Reclose In
- 2) SEF In
- 3) Instantaneous Protection In
- 4) ASC Shorting Switch Non-Auto
- 5) Tap-change Control Independent
- 6) Tap-change Control Parallel

Button Description:

Clear Button / Lens with 110V lamp and guard

Contact Arrangement:

2x NO contacts, 1x NC contact

Engraving Requirements:

- | | | | |
|----|--------------------|----|---------------------------------------|
| 1) | A-R
IN | 2) | SEF
IN |
| 3) | INST
IN | 4) | ASC SS
AUTO
CLOSING
NON-AUTO |
| 5) | TCC
INDEPENDENT | 6) | TCC
PARALLEL |

Black Lettering on white background

Manufacturer:

EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.030.7	Illuminated Clear Push Button
704.600.7	Extended Ring
704.900.3	Contact Block 2 N/O
704.900.2	Contact Block 1 N/C
RS 208-841	130V AC/DC BA9 LED Cluster

PUSH BUTTON SWITCH AND LAMP DATA SHEET

REFERENCE: PB2

Switch Functions:

- 1) Auto Reclose Out
- 2) SEF Out
- 3) Instantaneous Protection Out
- 4) ASC Shorting Switch Auto

Button Description:

Clear Button / Lens with 110V lamp and guard

Contact Arrangement:

2x NO contacts, 1x NC contact

Label Engraving:

1)

A-R
OUT

2)

SEF
OUT

3)

INST
OUT

4)

ASC SS
AUTO
CLOSING
AUTO

Black Lettering on white background

Manufacturer:

EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.030.7	Illuminated Clear Push Button
704.600.7	Extended Ring
704.900.3	Contact Block 2 N/O
704.900.2	Contact Block 1 N/C
RS 208-841	130V AC/DC BA9 LED Cluster

PUSH BUTTON SWITCH AND LAMP DATA SHEET


REFERENCE: PB3

Switch Function: 1) Auto Reclose counter reset
2) Auto Reclose lockout reset
3) ASC Scheme Lockout Reset

Button Description: Black button with guard

Switch Contact Arrangement: 2x NO contacts

Label Engraving:

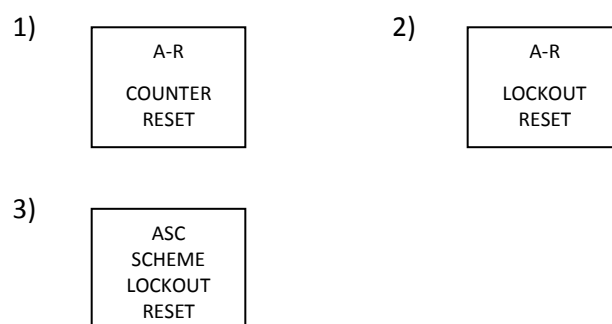

Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.010.0	Black Push Button
704.600.7	Extended Ring
704.900.3	Contact Block 2 N/O

PUSH BUTTON SWITCH AND LAMP DATA SHEET

REFERENCE: PB4


Switch Function: 1) ASC shorting switch test close

Button Description: Black button with guard

Switch Contact Arrangement: 2x NO contacts, 2x NC contacts

Label Engraving:

1)



Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.010.0	Black Push Button
704.600.7	Extended Ring
704.900.3	Contact Block 2 N/O
704.900.4	Contact Block 2 N/C


PUSH BUTTON SWITCH AND LAMP DATA SHEET**REFERENCE: IL1**

Indication Lamp Function: 1) SEF Auto Enabled

Description: Clear Lens Indicator

Label Engraving:

1)



Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.002.7	Clear Indicator
RS 208-841	130V AC/DC BA9 LED Cluster

PUSH BUTTON SWITCH AND LAMP DATA SHEET**REFERENCE: IL2**

Indication Lamp Function: 1) Circuit breaker closed, or
2) ASC shorting switch closed

Description: Red Lens Indicator

Label Engraving:

1)

CB CLOSED

2)

ASC SS CLOSED

Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.002.2	Red Indicator
RS 208-841	130V AC/DC BA9 LED Cluster

PUSH BUTTON SWITCH AND LAMP DATA SHEET**REFERENCE: IL3**

Function: 1) Circuit breaker open, or
2) ASC shorting switch open

Description: Green Lens Indicator

Label Engraving:

1)

CB OPEN

2)

ASC SS OPEN

Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.002.5	Green Indicator
RS 208-841	130V AC/DC BA9 LED Cluster


PUSH BUTTON SWITCH AND LAMP DATA SHEET**REFERENCE: IL4**

Indication Lamp Function: 1) Circuit Breaker Springs Charged

Description: Blue Lens Indicator

Label Engraving:

1)



Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.002.6	Blue Indicator
RS 208-841	130V AC/DC BA9 LED Cluster

PUSH BUTTON SWITCH AND LAMP DATA SHEET


REFERENCE: IL5

Indication Lamp Function: ASC Alarm

Description: Amber Lens Indicator

Label Engraving:

1)



Black Lettering on white background

Manufacturer: EAO (Elektro-Apparatebau Olten AG)

Details:

Manufacturer's Reference	Description
704.002.4	Yellow Indicator
RS 208-841	130V AC/DC BA9 LED Cluster

APPENDIX D

SUPERSEDED DOCUMENTATION

EE SPEC 3/4 shall be withdrawn from the WPD Policy Index on 30 November 2017 and from the WPD TechInfo website on 1 August 2017 following issue of this document.

APPENDIX E

ASSOCIATED DOCUMENTATION

EE SPEC:87

EE SPEC:98

APPENDIX F

IMPACT ON COMPANY POLICY

This document is relevant to all staff involved in the specification, purchase, installation and commissioning of 132kV 66kV, 33kV and 11kV circuit breakers, transformers and associated protection and control systems.

APPENDIX G

KEY WORDS

Circuit Breaker, Panel, Cubicle, Protection, Alarm, Transducer, Telecontrol, Auxiliary Relay.