

COMPANY DIRECTIVE

STANDARD TECHNIQUE: CAØB/2

Procedures for live changing of LV Domestic Cut-Outs on PVC or XLPE Plain or Split Concentric and PILC cables

Policy Summary

This Standard Technique document contains all the approved procedures for live changing LV Service Domestic Cut-Outs for PVC or XLPE Plain or Split Concentric and PILC cables. It shall be implemented in conjunction with the appropriate General Requirements in ST: CAØC.

This ST has not been written as a training document. It is not intended to be exhaustive in content and you must refer to your supervisor if you require training or instruction.

You shall work safely and skilfully, utilising the training/instruction you have already received, relating to the contents of this document and its cross-references.

You must make sure that you understand your job instructions and that you have the necessary tools and equipment for the job.

Author: Richard Summers

Implementation Date: May 2021

Approved by



Carl Ketley-Lowe
Engineering Policy Manager

Date: 21st May 2021

Target Staff Group	All staff who are involved in the changing of cut-outs
Impact of Change	RED – Significant impact
Planned Assurance checks	Team Managers to audit as part of their routine auditing regime

NOTE: The current version of this document is stored in the WPD Corporate Information Database. Any other copy in electronic or printed format may be out of date. Copyright © 2021 Western Power Distribution

IMPLEMENTATION PLAN

INTRODUCTION

This document replaces the existing version, ST: CAØB/1. This document contains all the approved procedures for live changing LV Domestic Cut-Outs for PVC or XLPE Plain or Split Concentric and PILC cables

MAIN CHANGES

- This document has been re-written to clarify the method of changing both live and dead cut-out.
- A table for fuse and service ratings has been added
- Requirement to record new cut-outs using the cut-out recording app.
- Requirement to remove loop cut-outs (within 12 months)
- Requirement to upgrade all cut-outs to 80/100A

IMPACT OF CHANGES

Major impact - This document makes changes to the types of cut-out and the methods that are used for changing live cut-outs.

IMPLEMENTATION ACTIONS

- Team Managers to brief out this ST to all staff involved with changing live cut-outs using both the ST and the training videos provided. This video is located at www.wpdafetyvideos.co.uk in the Jointing Section.
- Local Examining Officer to re-assess all Authorised staff within 4 months of the issue of this document.

IMPLEMENTATION TIMETABLE

The document can be implemented with following briefings.

REVISION HISTORY

Document Revision & Review Table		
Date	Comments	Author
May 2021	<ul style="list-style-type: none">• Document re-written to reflect the updated procedures for changing live cut-outs.• Flow charts added to give guidance on cut-out types that can be changed live.• Fuse size table added.• Requirement to remove loop cut-outs added.• Requirement to record replacement cut-outs to the app added.• Authorised staff to be re-assessed within 4 months of the issue of this document by their local Examining Officer	Richard Summers

Contents

1.0	INTRODUCTION	5
2.0	GENERAL PRINCIPLES / PRACTICES APPLICABLE TO ALL CUT-OUT CHANGES	5
3.0	CONVERTING TO PME	6
4.0	CUT-OUT SELECTION	6
5.0	CUT-OUT FUSE RATING	7
6.0	AUTHORISATION	7
7.0	ASBESTOS	8
8.0	PHENOLIC CUT-OUTS (BLACK PLASTIC TYPE)	8
9.0	LOOP CUT-OUTS	8
10.0	NON STANDARD CUT-OUTS	8
11.0	FLOW CHART 1 - PLASTIC TYPE CUT-OUT CHANGING	9
12.0	FLOW CHART 2 - IRON CLAD CUT-OUT CHANGING	10
7.501	- PROCEDURE FOR CHANGING PLASTIC TYPE CUT-OUTS WITH THE INCOMING PLASTIC SERVICE CABLE LIVE – DRY CHAMBER ONLY	11
7.502	- PROCEDURE FOR CHANGING PLASTIC TYPE CUT-OUTS WITH THE INCOMING PILC SERVICE. CABLE LIVE – NON COMPOUND FILLED	14
7.503	- PROCEDURE FOR CHANGING PLASTIC TYPE, COMPOUND FILLED CUT-OUTS WITH THE INCOMING PILC. SERVICE CABLE LIVE	17
7.504	- PROCEDURE FOR CHANGING METAL CLAD, COMPOUND FILLED CUT-OUTS WITH THE INCOMING SERVICE LIVE	21
7.505	- CHANGING 3 PHASE CUT-OUTS ON PVC/XLPE CABLE WITH THE INCOMING SERVICE CABLE LIVE. SINGLE POLE CUT-OUT TYPES ONLY	27
7.506	- PROCEDURE FOR CHANGING METAL CLAD, COMPOUND FILLED CUT-OUTS WITH THE SEPARATE PHASE AND NEUTRAL “TOPS”	31
7.507	- FITTING EARTH CONNECTIONS AND CONVERTING TO PME	37
7.508	- CHANGING CUT-OUTS WITH THE INCOMING SERVICE CABLE DEAD	41
	APPENDIX A - Superseded Documentation	43
	APPENDIX B - Record of Comment during Consultation	43
	APPENDIX C - Associated Documentation	43
	APPENDIX D - Key Words	43

ST: CAØB/2 Procedure for Changing Domestic Cut-outs (up to 100A) With the Incoming Service Live

1.0 INTRODUCTION

This Standard Technique document contains approved procedures and general principles to be used when changing live cut-outs. whilst working with LV service cables and their associated equipment. It shall be implemented in conjunction with the appropriate Jointing Procedure where required, and General Requirements in ST: CAØC, including:

1. General Cleanliness and Accident Prevention
2. General Jointing Procedures - Dead Cables
3. General Jointing Procedures and Safety Precautions - Live Cables

2.0 GENERAL PRINCIPLES / PRACTICES APPLICABLE TO ALL CUT-OUT CHANGES

- Use flowcharts to determine if the cut-out is suitable for live changing.
- Confirm Polarity, Earth Loop Impedance and Phase Rotation before changing the cut-out.)
- Identify and mark the Polarity of the outgoing tails and the incoming cable.
- Switch off all consumer units and remove the previously marked outgoing tails from the top of the cut-out and shroud.
- Remove all out-going earth wires and insulated / shroud.
- Shroud all adjacent metalwork using approved shrouding material
- All PPE as detailed in ST:CAØC - GR3 shall be used
- Confirm Earthing arrangement:- PME, SNE or TT
- Ensure there is sufficient access to change the cut-out safely.
- Complete and document Risk Assessment
- If the condition of the cut-out or environment change, stop work and re assess the job – always be prepared to cut the cable or make the cable dead.
- Once the cut-out has been changed all details must be added to the cut-out recording app.
- Where core trimming is required this can be done, however all other conductors must be fully shrouded and live working techniques must be used.
- All cut-outs must be mounted on their FR backboards (supplied)
- Meter board should be change if required.


3.0 CONVERTING TO PME

Existing Arrangement to be maintained unless it is verified that the network and customer installation is capable for an alternative arrangement e.g. conversion from SNE to PME.

When conversions from SNE to PME - the earth should be presented via the earth terminal in the cut-out as opposed to an external earth bar.

4.0 CUT-OUT SELECTION

SNE CUT-OUT FOR CUT-OUT CHANGES

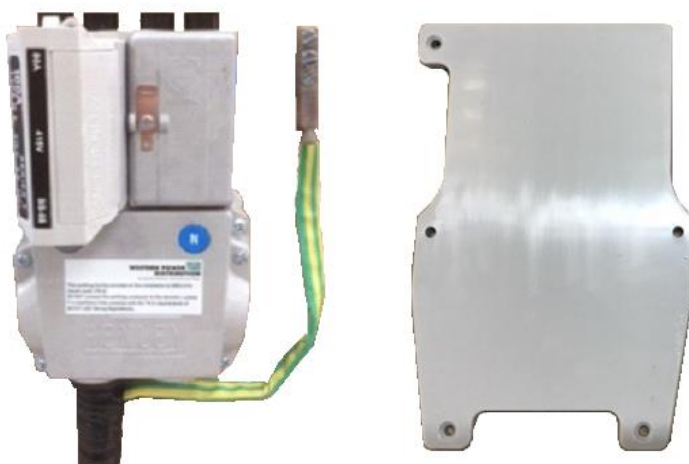


Note the separate earth block and tailored FR backboard (must always be fitted)

E5 code - 43553

SNE CUT-OUT FOR CUT-OUT CHANGES (OUTDOOR METER BOXES)

PME CUT-OUT

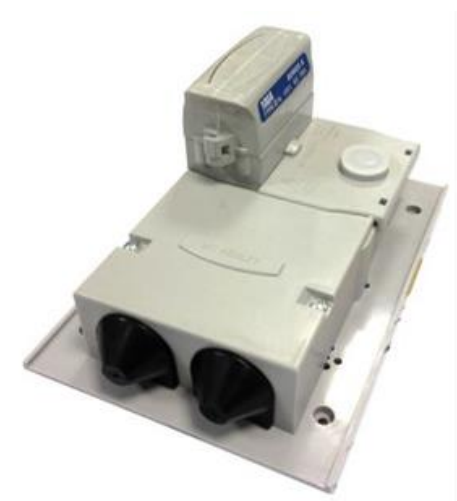

Note the electrician has access to the neutral/earth block to connect their earths. Also with FR board that must be used. This FR board can be fixed to meter boards or inside meter boxes as a slope board.

E5 code – 43551 (backboard cut-out), 43545 (cable cover and backboard)

5.0 CUT-OUT FUSE RATING

With the increased use of electric vehicles and alternative energy devices the maximum rating should be provided however the cut-out and service must never be overloaded as this will increase the risks of failure or fire.

When any work or inspection is taking place at the service position or on the service cable the cut-out shall be inspected / upgraded so that the service is capable of providing 80/100A.

The table below is aimed at providing a general guidance on the **maximum** fuse sizes that should be used. For full details on fuse size please see ST: SD5D.

Upsizing fuses can only take place if the ELI is acceptable – see ST: SD5R

Meter tails must be 25mm Cu

Service Cable Type	Cable Size	Environment	Max Fuse Size	Notes
PILC	Less than 0.0225sq"	N/A	N/A	Cable too small for 100A – Fuse at 80A
PVC/XLPE	Less than 16mm Cu or 25mm Al	N/A	N/A	Cable too small for 80A - Service replacement required
PILC	0.0225sq" or larger	Ventilated Area	80A	Fuse at 60A if enclosed
PVC/XLPE	16mm Cu or 25mm Al	Meter Box	80A	Load limited to 80A inside Meter Box
PVC/XLPE	16mm Cu or 25mm Al	Ventilated Area	80A	
PVC/XLPE	25mm cu or 35mm Al	Meter Box	80A	Load limited to 80A inside Meter Box
PVC/XLPE	25mm cu or 35mm Al	Ventilated Area	100A	

6.0 AUTHORISATION

Persons changing plastic type single phase cut-outs with unfilled chambers shall hold a WPD authorisation of COPLA and be accompanied by a second appropriately authorised person.

Persons changing metal clad or plastic type single phase single phase cut-outs, connected to PILC cables with compound filled chambers shall hold a WPD authorisation of COMET and be accompanied by a second appropriately.

To ensure all crafts persons are up to date with these new methods of work they must be re-assessed within 4 months of the issue of this document by their local Examining Officer. After which time any person who has not been re-assessed will have their authorisations removed.

7.0 ASBESTOS

Metal clad cut-outs may contain asbestos material and an area which must be considered whilst undertaking the risk assessment.

Whilst preparing the cut-out for changing and in the event of suspected asbestos material being found the craftsman shall refer to Special Procedure 10.1 "Working with Metal Clad Cut-Outs Which May Contain Asbestos Material".

8.0 PHENOLIC CUT-OUTS (BLACK PLASTIC TYPE)

Phenolic materials were manufactured by impregnating paper pulp, cotton or glass fibre with phenolic resin. This was then cured using heat and pressure. When overheated this material can breakdown leaving an ash like substance. When moist this ash can conduct leading to tracking and failure. If this ash is disturbed there is a possibility of short circuit. For this reason where a phenolic cut-out is to be changed due to overheating the cut-out must be made dead before work starts.


9.0 LOOP CUT-OUTS

Where loop services are encountered the loop to the adjacent property shall be removed and both properties shall be provided with separate services. If it is not possible to relay the service during the cut-out change a planned replacement shall be programmed. The replacement must take place within 12 months


10.0 NON STANDARD CUT-OUTS

The procedures contained in this document have been designed around the standard / generic types of cut-out. There are probably hundreds of different types of cut-out on our network so providing details on all models is not possible. Where staff encounter differing designs of cut-out they should use Flow Charts 1 and 2 to decide if the unit is suitable for a live change. Where there is any doubt the cut-out shall be made dead before it is changed.

11.0 FLOW CHART 1 - PLASTIC TYPE CUT-OUT CHANGING

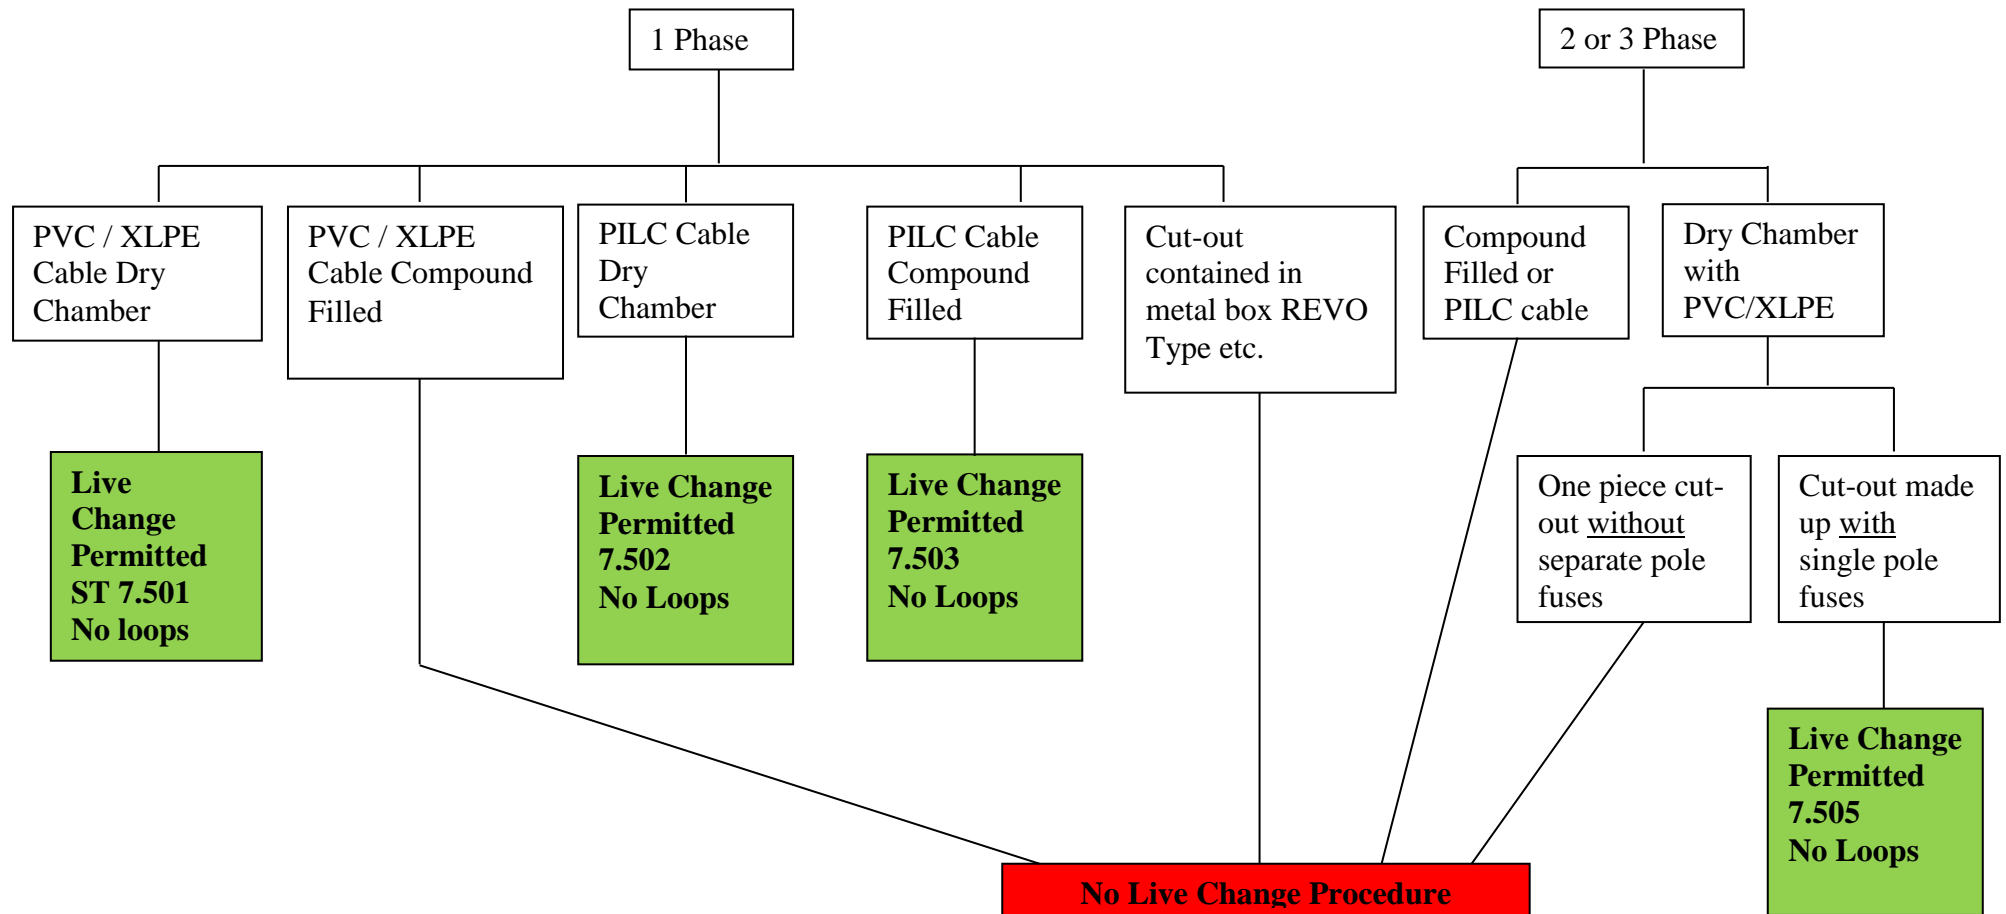

12.0 FLOW CHART 2 - IRON CLAD CUT-OUT CHANGING

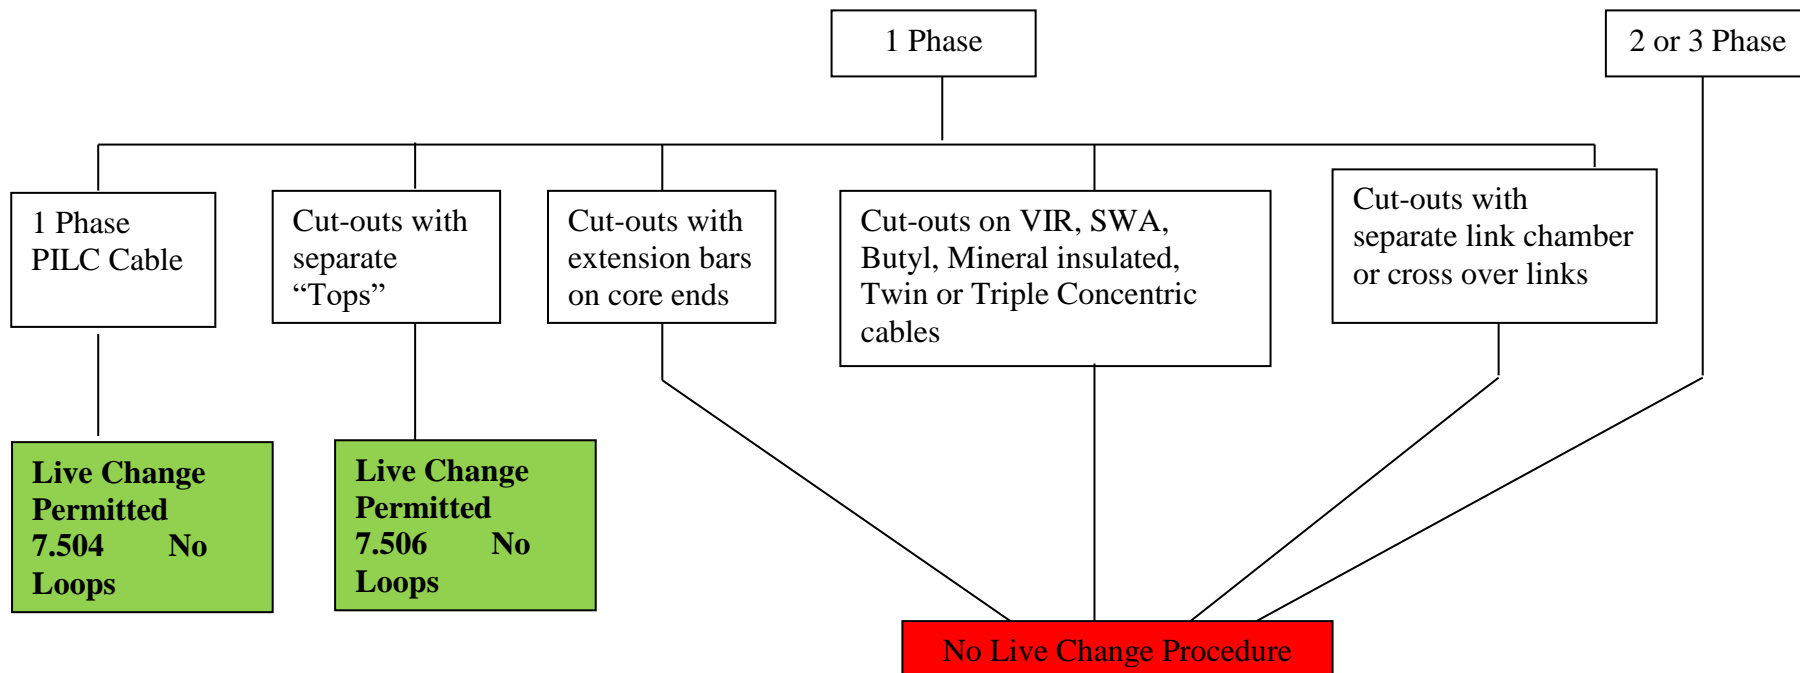

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.501

**7.501 - PROCEDURE FOR CHANGING PLASTIC TYPE CUT-OUTS WITH THE
INCOMING PLASTIC SERVICE CABLE LIVE – DRY CHAMBER ONLY**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

MATERIALS LIST

	Item Quantity
Replacement cut-out	1

ADDITIONAL ITEMS FOR EACH TERMINATION

Insulation patch
Heat shrink tubing
PVC adhesive tape
PVC marker tapes
Seals
Sealing wire

Note: - Individual material item numbers (SHOPS) are to be found in Section 4 of the LV Service Cable Jointing Manual.

JOINTING PROCEDURE 7.501

1. Carry out the General Principles / Practices applicable to all cut-out changes detailed on page 3 and confirm that the cut-out is suitable for a live change using flowcharts 1 and 2.
2. Remove the fuse carrier and neutral cover (and earth block from meter board if applicable).
3. Remove the earth conductors from the earth block (if applicable) and shroud.
4. Undo the terminal screws that hold the neutral earth conductor. Remove the conductor from the neutral/earth terminal block and bend it down away from the phase terminals, lay onto the outer-sheath of the service cable.
5. Shroud the neutral earth conductor.
6. Whilst holding the service cable, remove the fixing screws that hold the cut-out to the meter board.
7. Undo the terminal screws that hold the phase conductor and lift the cut-out off the cable. Fit insulating cap onto the phase core.
8. Prepare the new cut-out before removing the phase cap and fitting the new cut-out onto the phase core.
9. Fix the cut-out and fire retardant backboard to the meter board.
10. Fit the neutral/earth conductor to the cut-out.
11. Check Voltage, Polarity and Earth Loop Impedance before reconnecting customers meter tails and earth conductors.
12. **Check all terminals screws** before reassembling the cut-out, fitting labels and sealing.
13. Switch on consumer units.

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.502

**7.502 - PROCEDURE FOR CHANGING PLASTIC TYPE CUT-OUTS WITH THE
INCOMING PILC SERVICE
CABLE LIVE – NON COMPOUND FILLED**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

MATERIALS LIST

	Item Quantity
Replacement cut-out	1

ADDITIONAL ITEMS FOR EACH TERMINATION

Insulation patch
Heat shrink tubing
PVC adhesive tape
PVC marker tapes
Seals
Sealing wire

Note: - Individual material item numbers (SHOPS) are to be found in Section 4 of the LV Service Cable Jointing Manual.

JOINTING PROCEDURE 7.502

Note. This procedure is only applicable when an iron clad cut-out has been previously replaced with a plastic type cut-out and the cable has been sealed with heatshrink tubes and breakout. If these have not been fitted when the cut-out was previously changed JP7.503 shall be used.

1. Carry out the General Principles / Practices applicable to all cut-out changes detailed on page 3 and confirm that the cut-out is suitable for a live change using flowcharts 1 and 2.
2. Remove the fuse carrier and neutral cover (and earth block from meter board if applicable).
3. Whilst holding the service cable, remove the fixing screws that hold the cut-out to the meter board.
4. Undo the terminal screws that hold both the phase and neutral earth conductor.
5. Lift the cut-out off the cable. Fit insulating cap onto the phase and neutral core.
6. Remove any remaining bitumen before over-tape the termination with 2 layers of 19mm VM tape whilst always keeping one cap in place (do not expose the phase and neutral cores at the same time) taking care to seal the crutch area. Secure the VM tape by applying 2 layers of PVC adhesive tape ensuring the termination is completely sealed. **Do not remove any cotton tapes that were applied when the cut-out was originally made.**
7. Prepare the new cut-out before removing the insulating caps and fit the new cut-out onto the cable cores before tightening the incoming terminal screws
8. Fix the cut-out and fire retardant backboard to the meter board
9. Check Voltage, Polarity and Earth Loop Impedance before reconnecting customers meter tails and earth conductors.
10. Check all terminals before reassembling the cut-out, fitting labels and sealing.
11. Switch on consumer units.

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.503

**7.503 - PROCEDURE FOR CHANGING PLASTIC TYPE, COMPOUND FILLED CUT-
OUTS WITH THE INCOMING PILC
SERVICE CABLE LIVE**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

MATERIALS LIST

	Item Quantity
Replacement cut-out	1


ADDITIONAL ITEMS FOR EACH TERMINATION

Insulation patch
Heat shrink tubing
PVC adhesive tape
PVC marker tapes
19mm “VM” tape
Seals
Sealing wire


Note: - Individual material item numbers (SHOPS) are to be found in Section 4 of the LV Service Cable Jointing Manual.

JOINTING PROCEDURE 7.503

1. Carry out the General Principles / Practices applicable to all cut-out changes detailed on page 3 and confirm that the cut-out is suitable for a live change using flowcharts 1 and 2.
2. Remove the fuse carrier and neutral cover (and earth block from meter board if applicable).
3. Remove the earth conductors from the earth block (if applicable) and shroud.
4. Remove the screws that secure the front of the compound chamber before splitting the case using a plastic hack knife. The knife should be positioned over the unused ports, away from the cable or cable cores and can be lightly tapped with a hammer. **If soft set bitumen has been used the bitumen must be melted out using a gas torch.**
4. Once the front of the cable chamber has been removed, inspect the cable/termination.
5. Undo the terminal screws that hold both the phase and neutral conductors.
6. Remove the fixing screws that hold the cut-out to the meter board and angle the cut-out forward slightly.
7. Whilst holding the service cable, gently tap the sides of the compound filled chamber with hand (do not use a hammer), pressing the base of the cut-out away from the cable. Do not damage the crutch or crack the core papers. **If soft set bitumen has been used or if you prefer the bitumen must be melted out using a gas torch.**

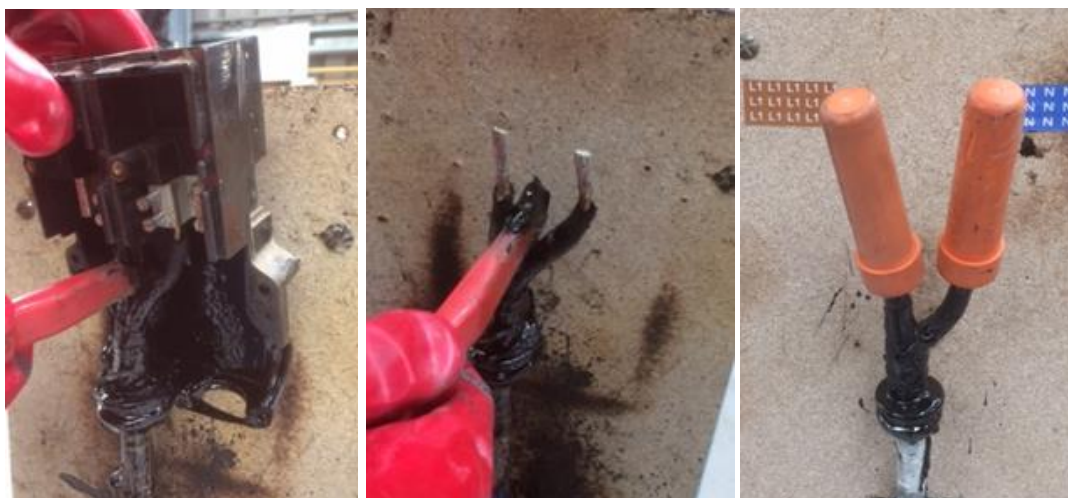

8. Lift the cut-out off the cable whilst keeping a wedge between the phase and neutral. Fit insulating cap onto the phase and neutral core.
9. Remove any remaining bitumen using a plastic wedge before over-taping the termination with 2 layers of 19mm VM tape whilst always keeping one cap in place (do not expose the phase and neutral cores at the same time) taking care to seal the crutch area. Secure the VM tape by applying 2 layers of PVC adhesive tape ensuring the termination is completely sealed. **Do not remove any cotton tapes that were applied when the cut-out was originally made.**
10. Mark the phase and neutral conductors using marker tapes.
11. Prepare the cut-out for fitting.
12. Ensure that the cores are held in position.
13. Remove the caps from the phase and neutral conductor and fit the new cut-out ensuring that the phase barrier remains between the phase and neutral. Keep the time that both the phase and neutral are exposed to a minimum. Tighten the terminal screws

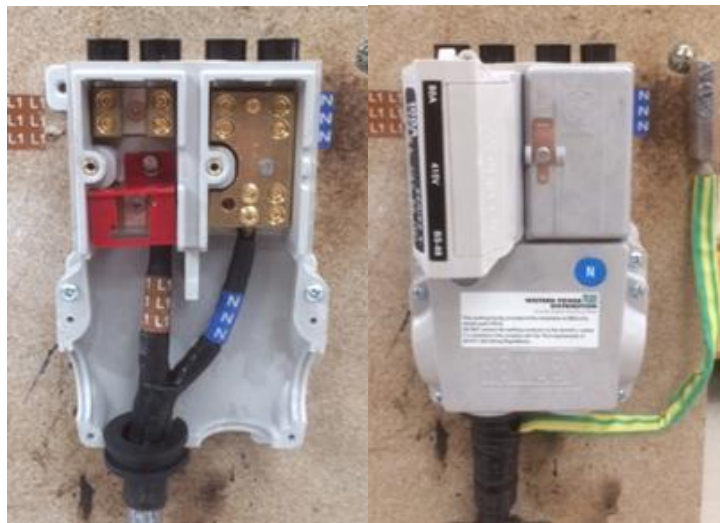

14. Fit earth connection if required.
15. Screw the FR backboard and cut-out to the meter board and check the Voltage, Polarity and Earth Loop Impedance before reconnecting customers meter tails and earth conductors.
16. Check all terminals before reassembling the cut-out, fitting labels and sealing.
17. Switch on consumer units

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.504

**7.504 - PROCEDURE FOR CHANGING METAL CLAD, COMPOUND FILLED CUT-
OUTS WITH THE INCOMING SERVICE LIVE**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

MATERIALS LIST

	Item Quantity
Replacement cut-out	1

ADDITIONAL ITEMS FOR EACH TERMINATION

Insulation patch
Heat shrink tubing
PVC adhesive tape
PVC marker tapes
19mm “VM” tape
Seals
Sealing wire

Note: - Individual material item numbers (E5) are to be found in Section 4 of the LV Service Cable Jointing Manual.

JOINTING PROCEDURE 7.504

1. Carry out the General Principles / Practices applicable to all cut-out changes detailed on page 3 and confirm that the cut-out is suitable for a live change using flowcharts 1 and 2.
2. Remove earth conductors between the iron clad case and lead sheath. Remove cut-out door and fuse carriers. Apply VM tape to both the phase and neutral terminals so that they are fully shrouded.
3. Check that the porcelain insulated spacers are in place and that they are not broken - Isolate the cut-out if broken or missing



VM tape shroud over terminals

Check spacers to ensure they are not damaged or missing

4. Remove the compound chamber fixing screws. Do not release the cut-out from the back-board at this stage.



5. Remove the front of the compound chamber by splitting the case using a plastic hack knife. The knife should be positioned over the unused ports away from the cable or cable cores and can be lightly tapped with a hammer
6. Once the front of the cable chamber has been removed, inspect the cable before removing the fixing screws that hold the cut-out to the meter board and angle the cut-out forward slightly. If extension bars are connected to the ends of the cable work must stop and the cut-out must be made dead.
7. Remove the screws that secure both porcelain carriers from the cast iron back plate. **If these screws cannot be removed work should stop and the cut-out must be made isolated.**



8. Gently tap the sides of the compound filled chamber with hand (do not use a hammer). Whilst doing this support the back plate to prevent it dropping when it becomes free - **If the back plate cannot be released with hand pressure or if soft set bitumen has been used or if you prefer the bitumen must be melted out using a gas torch.**
9. Lift off the back plate from the cable leaving the porcelain carriers attached to the cable cores
10. Remove any remaining bitumen using a plastic wedge – do not use a hammer. **If soft set bitumen has been used or if you prefer the bitumen must be melted out using a gas torch.**
11. Remove insulation patch on one of the porcelain carriers and undo the two terminal screws whilst supporting the carrier




12. Remove the porcelain carrier and porcelain spacer then cover the cable core with a core cap.
13. Repeat this procedure on the other core and then remove the grommet.



14. Remove any remaining bitumen using a plastic wedge before over-taping the termination with 2 layers of 19mm VM tape whilst always keeping one cap in place (do not expose the phase and neutral cores at the same time) taking care to seal the crutch area. Secure the VM tape by applying 2 layers of PVC adhesive tape ensuring the termination is completely sealed. **Do not remove any cotton tapes that were applied when the cut-out was originally made.**
15. Mark the phase and neutral conductors using marker tapes.
16. Prepare the cut-out for fitting.
17. Ensure that the cores are held in position.

18. Remove the caps from the phase and neutral conductor and fit the new cut-out ensuring that the phase barrier remains between the phase and neutral. Keep the time that both the phase and neutral are exposed to a minimum. Tighten the terminal screws

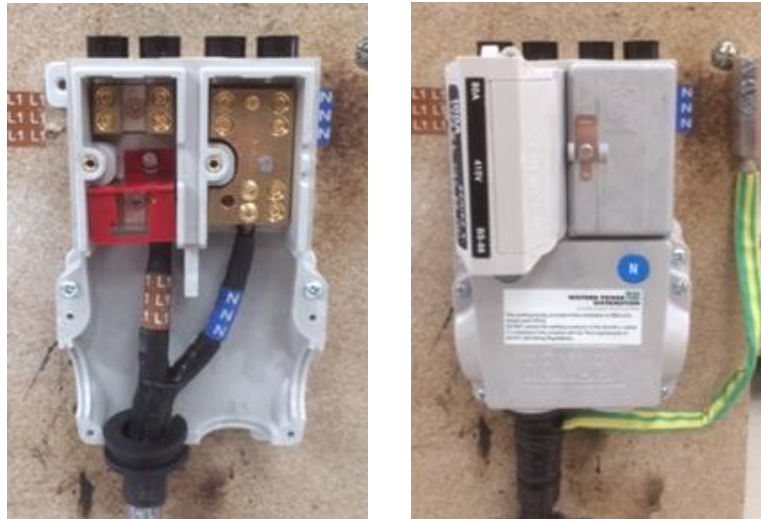

19. Fit earth connection if required.
20. Screw the cut-out to the fire retardant backboard and mount the FR board onto the meter board.
21. Check the Voltage, Polarity and Earth Loop Impedance before reconnecting customers meter tails and earth conductors.
22. Check all terminals before reassembling the cut-out, fitting labels and sealing.
23. Switch on consumer units

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.505

**7.505 - CHANGING 3 PHASE CUT-OUTS ON PVC/XLPE CABLE WITH THE
INCOMING SERVICE CABLE LIVE
SINGLE POLE CUT-OUT TYPES ONLY**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

MATERIALS LIST

	Item Quantity
Replacement cut-out	1

ADDITIONAL ITEMS FOR EACH TERMINATION

Insulation patch
Heat shrink tubing
PVC adhesive tape
PVC marker tapes
19mm “VM” tape
Seals
Sealing wire

JOINTING PROCEDURE 7.505

Note. When carrying out this procedure a cable cleat may be required below the cut-out to prevent the cable dropping when the fixing screws are removed

1. Carry out the General Principles / Practices applicable to all cut-out changes detailed on page 3 and confirm that the cut-out is suitable for a live change using flowcharts 1 and 2.
2. Remove the fuse carrier and neutral cover (and earth block from meter board if applicable).
3. Remove the cable chamber before refitting the neutral cover.
4. Shroud the neutral earth conductor.
5. Prepare the new cut-out for fitting.
6. Undo the terminal screws from the L1 fuse carrier and remove the L1 fuse carrier.
7. Immediately replace the original L1 fuse carrier with the new one.
8. Temporarily refix the single pole fuse to the meter board
8. Repeat items 6,7 and 8 on the L2 fuse carrier.
9. Undo the terminal screws that hold the neutral/earth conductor and remove the conductor by bending the strands against the service cable (away from the L3 conductor).
10. Shroud the neutral/ earth wires.
11. Whilst holding the cable, undo the terminal screws and fuse carrier fixings before lifting off the original phase / neutral unit.
12. Immediately replace the combined L3/neutral/earth unit with a new unit.
13. Remove shrouding from the neutral/earth wires and connect them into the neutral/earth terminal.
6. Undo the fixing screws that hold the L1 and L2 single pole fuse carriers onto the meter board and slide behind the fire retardant cut-out board.
7. Fix the FR cut-out board and fuse units into final position.
8. Check the Voltage, Polarity and Earth Loop Impedance before reconnecting customers meter tails and earth conductors.

9. Check all terminals before reassembling the cut-out, fitting labels and sealing.
10. Switch on consumer units.

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.506

**7.506 - PROCEDURE FOR CHANGING METAL CLAD, COMPOUND FILLED CUT-
OUTS WITH THE SEPARATE PHASE AND NEUTRAL “TOPS”**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

MATERIALS LIST

Item Quantity

Replacement cut-out

1

ADDITIONAL ITEMS FOR EACH TERMINATION

Insulation patch

Heat shrink tubing

PVC adhesive tape

PVC marker tapes


19mm “VM” tape

Seals


Sealing wire


JOINTING PROCEDURE 7.506

1. Carry out the General Principles / Practices applicable to all cut-out changes detailed on page 3 and confirm that the cut-out is suitable for a live change using flowcharts 1 and 2.

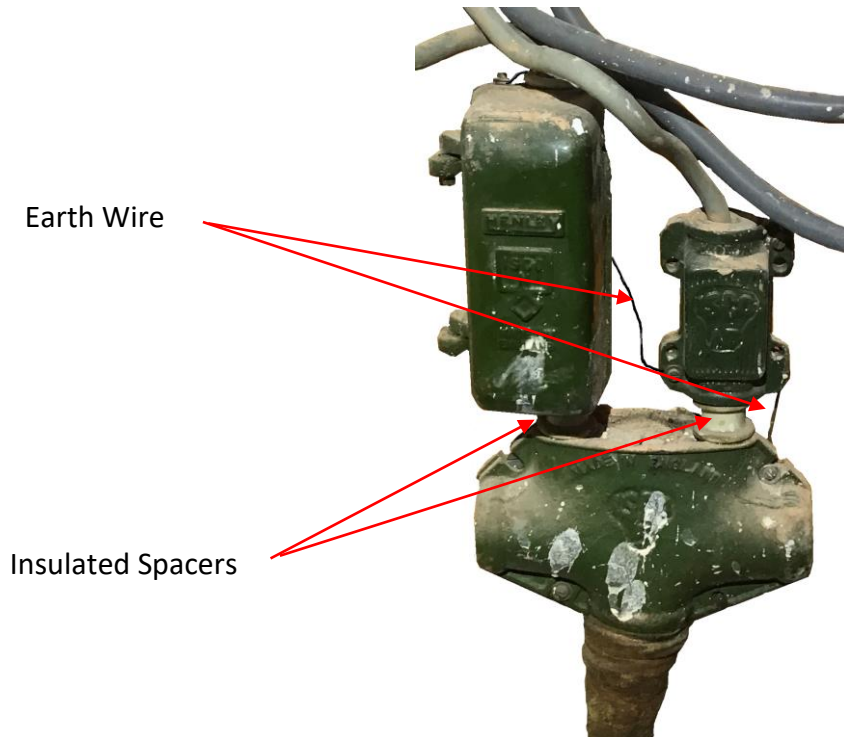

2. **Ensure that the insulated spacers are fitted and that they are in good condition.** If these spacers are not present or are damaged the cut-out must not be changed live.
3. Remove earth conductors between the iron clad case, “tops” and lead sheath.
4. Open and remove the phase door/cover and shroud the incoming terminal with VM tape before removing the out-going meter tails.

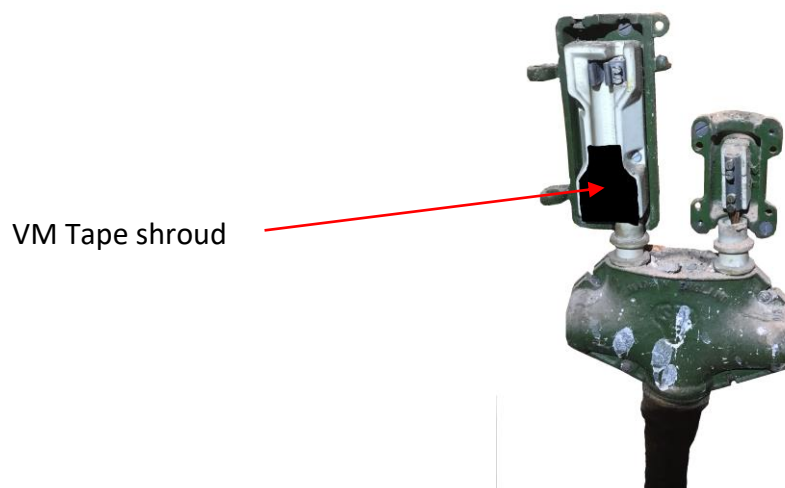

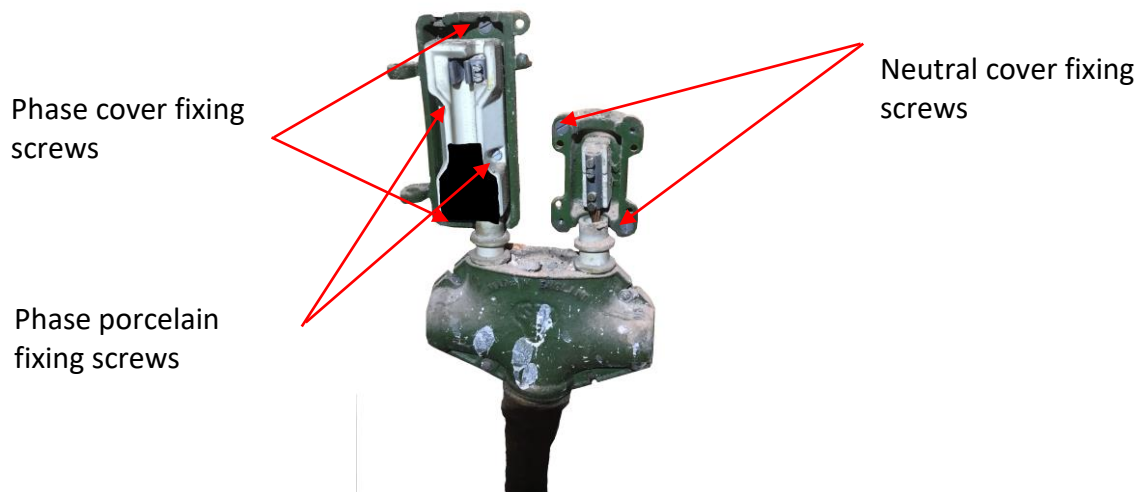


5. Remove the two fixing screws that attach the neutral cover to the meter board then unscrew the terminal screws. Lift off the neutral terminal before shrouding the core with an end cap.
6. Remove the phase cover screws and the screws that secure the compound filled base to the meter board. Gently ease the cut-out forward, away from the board.
7. Remove the two screws that fix the porcelain fuse base to the iron phase cover whilst holding to prevent it dropping. Lift off the iron phase cover leaving the porcelain fuse base attached to the core.
8. Once the iron phase cover has been removed, remove the VM tape and undo the phase terminal screws. Lift off the porcelain fuse base off the core before fitting an insulated core cap.



9. Remove the front of the compound chamber by splitting the case using a plastic hack knife. The knife should be positioned over the unused ports away from the cable or cable cores and can be lightly tapped with a hammer

10. Once the front of the cable chamber has been removed, inspect the cable. If extension bars are connected to the ends of the cable work must stop and the cut-out must be made dead.
11. Gently tap the sides of the compound filled chamber with hand (do not use a hammer). Whilst doing this support the back plate to prevent it dropping when it becomes free - **If the back plate cannot be released with hand pressure or if soft set bitumen has been used or if you prefer the bitumen must be melted out using a gas torch.**
12. Lift off the back plate from the cable
13. Remove any remaining bitumen using a plastic wedge – do not use a hammer. **If soft set bitumen has been used or if you prefer the bitumen must be melted out using a gas torch.**
14. Remove the end cap from the neutral core and slide off the insulated spacer and then refit the end cap.
15. Remove the end cap from the phase core and slide off the insulated spacer and then refit the end cap
16. Remove any remaining bitumen using a plastic wedge before over-taping the termination with 2 layers of 19mm VM tape whilst always keeping one cap in place (do not expose the phase and neutral cores at the same time) taking care to seal the crutch area. Secure the VM tape by applying 2 layers of PVC adhesive tape ensuring the termination is completely sealed. **Do not remove any cotton tapes that were applied when the cut-out was originally made.**
17. Mark the phase and neutral conductors using marker tapes.
18. Prepare the cut-out for fitting.
19. Ensure that the cores are held in position.
20. Remove the caps from the phase and neutral conductor and fit the new cut-out ensuring that the phase barrier remains between the phase and neutral. Keep the time that both the phase and neutral are exposed to a minimum. Tighten the terminal screws
21. Fit earth connection if required.
22. Screw the cut-out to the fire retardant backboard and mount the FR board onto the meter board.

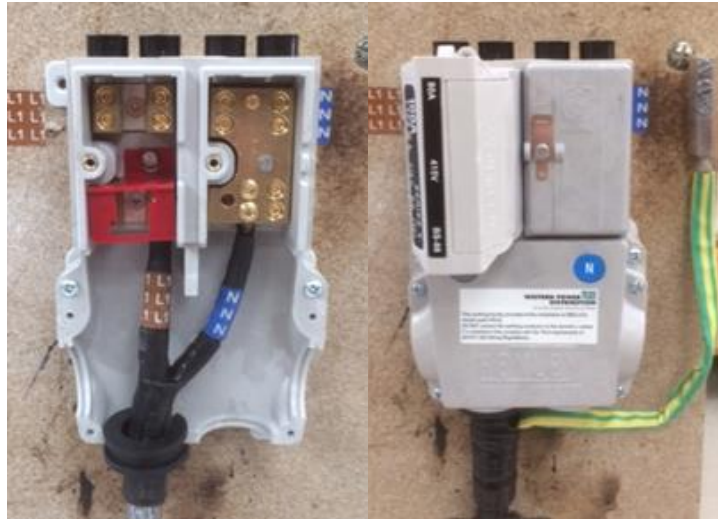

23. Check the Voltage, Polarity and Earth Loop Impedance before reconnecting customers meter tails and earth conductors.
24. Check all terminals before reassembling the cut-out, fitting labels and sealing.
25. Switch on consumer units

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.507



7.507 – FITTING EARTH CONNECTIONS AND CONVERTING TO PME



**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

JOINTING PROCEDURE 7.507

CAUTION – Roll springs may have sharp edges and gloves are to be worn



1. Remove the serving, armour and bedding in accordance with General Requirement 9 if required
2. Ensure the lead sheath and tape armour is thoroughly abraded and cleaned with the approved solvent Fig 1. Apply the tinned copper mesh over the abraded surfaces.
3. Lay the earth braid directly onto the tinned copper mesh Fig 2.
4. Apply roll spring over the braid and tape armour Fig 3.
5. Apply roll spring over the braid and lead sheath Fig 3.
6. Tighten (with gloved hand) both roll springs by twisting in the direction they were applied Fig 3.
7. Cover the complete assembly using a minimum of 3 layers black PVC tape Fig 4.

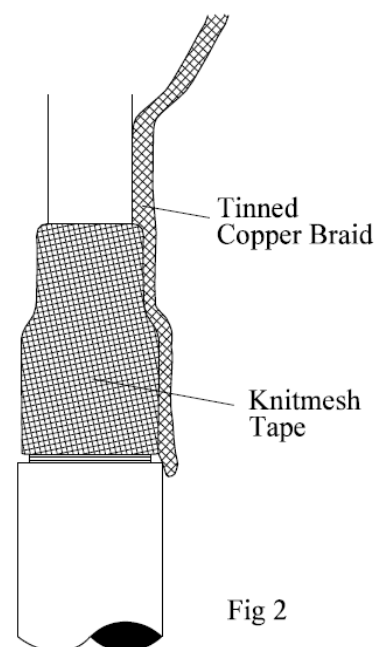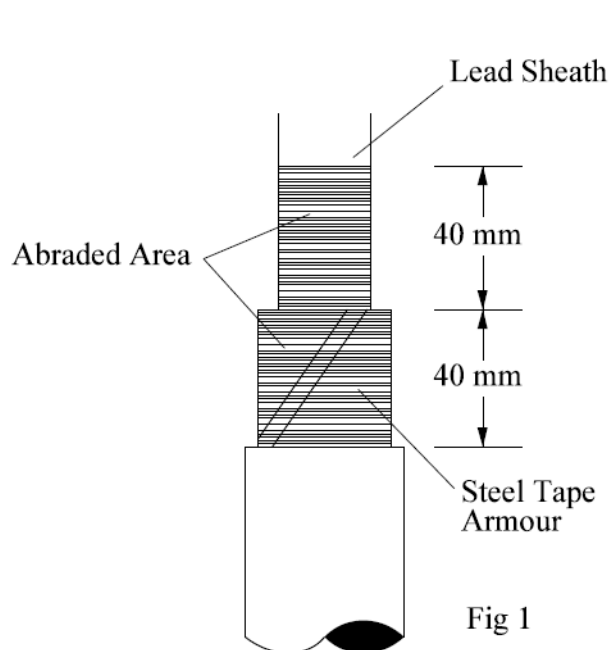

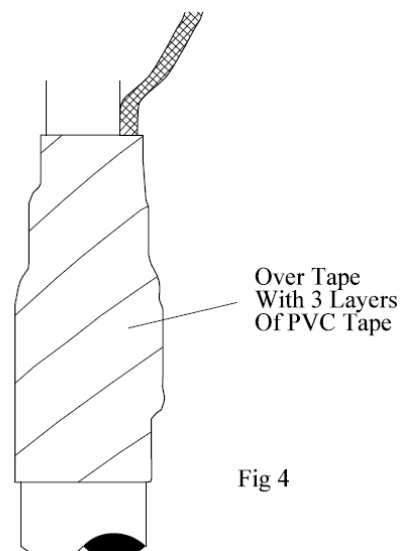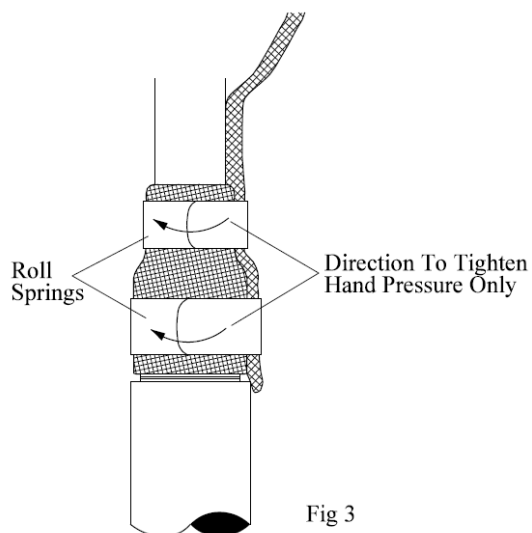

Please note: - When converting a PILC service to PME at the cut-out a SNE cut-out (with link connected) must be used – see drawing 1. Where the cut-out is non-linkable it must be changed.

Where an upgrade to an earth terminal is required and the existing cut-out is rated at 80A, is of a plastic design and has been recently changed it is acceptable to replace only the earth terminal as shown in drawing 2. **In all other scenarios the cut-out must be replaced**

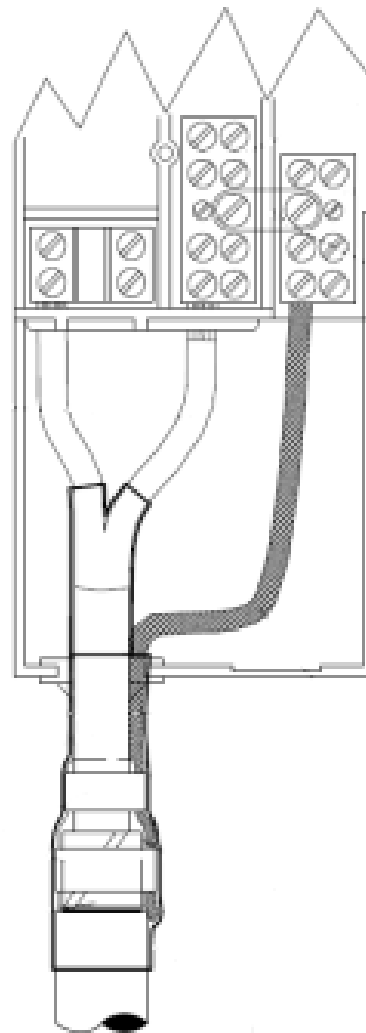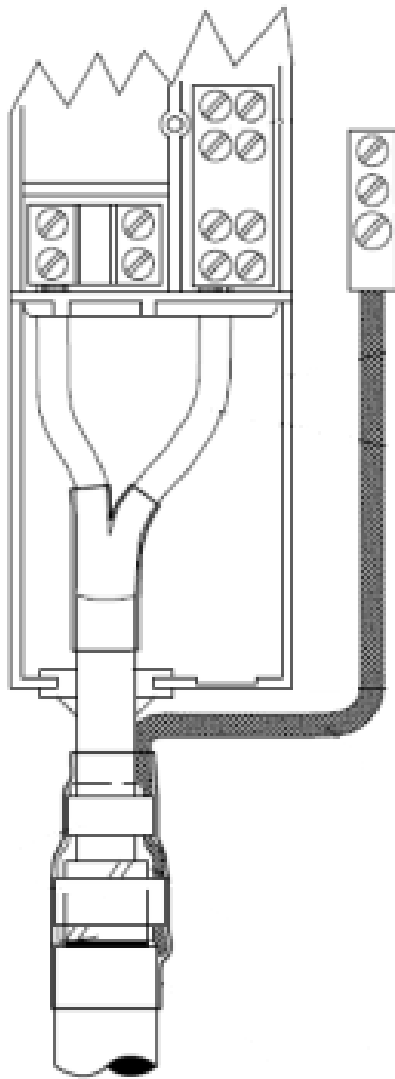

**PROCEDURE FOR CHANGING DOMESTIC CUT-OUTS (UP TO 100A) WITH THE INCOMING
SERVICE LIVE**

JOINTING PROCEDURE 7.508

**7.508 - CHANGING CUT-OUTS WITH THE INCOMING
SERVICE CABLE DEAD**

**This procedure is to be read in conjunction with the appropriate
General Requirements ST: CAØC Section 6
of the LV Service Cable Jointing Manual**

JOINTING PROCEDURE 7.508

When changing cut-outs under dead conditions there is always a possibility that the incoming service could become energized from inadvertent backfeeds or customer generation. Therefore unless the whole length cable between the point of isolation and the cut-out can be visibly traced (in accordance with GR2 Working on Live/Dead LV Underground Cables.) the cut-out must be changed using the appropriate live changing procedure.

Where the cut-out is of a non-standard design or where there is no live changing procedure the cable must be made dead and the cut-out tested to prove that it is dead. The cut-out can then be changed using the principles associated with live cut-out changing. The cut-out must be tested periodically to confirm the cable remains dead. The appropriate live working PPE must be worn in case the service cable becomes live (see GR2).

Where the cable can be visibly traced from the point of isolation to the cut-out and there is no possibility that it can be re-energised the cut-out can be changed without live working PPE. General PPE as listed in ST: CAØC-GR3 must be worn.

APPENDIX A

SUPERSEDED DOCUMENTATION

This Standard Technique supersedes ST: CAØB/1 dated May 2012 which should now be withdrawn.

APPENDIX B

RECORD OF COMMENT DURING CONSULTATION

[Comments](#)

APPENDIX C

ASSOCIATED DOCUMENTATION

ST:CAØA, ST:CAØB, ST:CAØC, ST:CAØM, ST:CAØN, ST:CAØS, ST:CAØT, ST:CAØU, ST:CAØV, ST:CAØW.

APPENDIX D

KEY WORDS

Cut-out, iron clad, fused neutral